

## Installation tips




Please don't tighten the screws completely and go back later for a final tightening of all the screws after pieces are aligned with each other .

Lay a mat or old blanket out to assemble onto so the floor and the furniture doesn't get scratched or damaged during building.


## Part List

①



Lift Column \*2

②




Crossbar \*2

③




Crossbar Center Rails \*2

④



Side Bracket \*2

⑤



Base \*2

⑥




Leveling Studs \*4

⑦



Control Box \*1

⑧



Handset \*1

⑨



Wires \*2

## Accessory Kit

Ⓐ



Qty \*8  
M6×12  
Screws

Ⓑ



Qty \*8  
M6×16  
Screws

Ⓒ



Qty \*4  
M6×8  
Screws

Ⓓ



Qty \*10  
M5×18  
Screws

Ⓔ



Qty \*2  
M4×12  
Screws

Ⓕ



Qty \*8  
M8×6  
Screws

Ⓖ



Qty \*10  
Washers

Ⓗ




Qty \*5  
Cable  
Clips

Ⓘ




4mm  
Allen  
Wrench

## STEP 1:

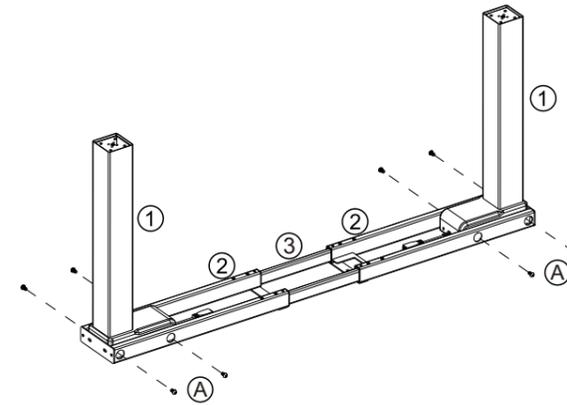


- |                         |     |
|-------------------------|-----|
| ① Lift Column           | * 2 |
| ② Crossbar              | * 2 |
| ③ Crossbar Center Rails | * 2 |
| Ⓐ M6×12 Screws          | * 8 |

## STEP 2:

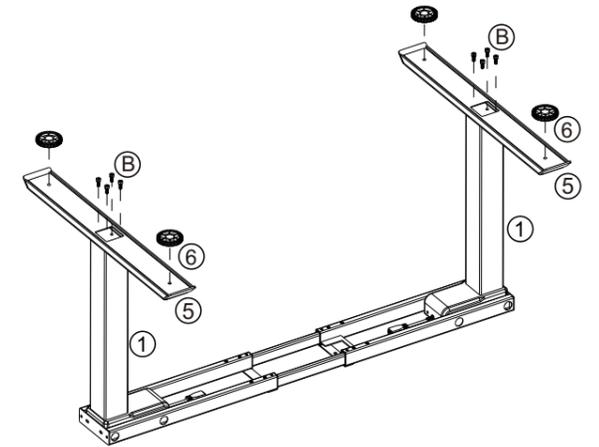


- |                  |     |
|------------------|-----|
| ① Lift Column    | * 2 |
| ⑤ Base           | * 2 |
| ⑥ Leveling Studs | * 4 |
| Ⓑ M6×16 Screws   | * 8 |

## STEP 3:

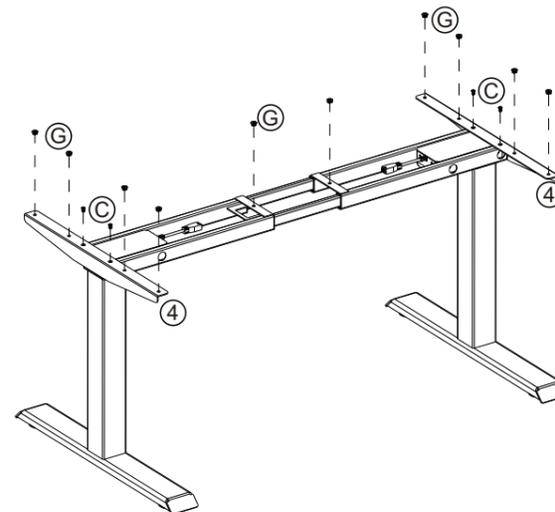


- |                |      |
|----------------|------|
| ④ Side Bracket | * 2  |
| Ⓒ M6×8 Screws  | * 4  |
| Ⓖ Washers      | * 10 |

## STEP 4:

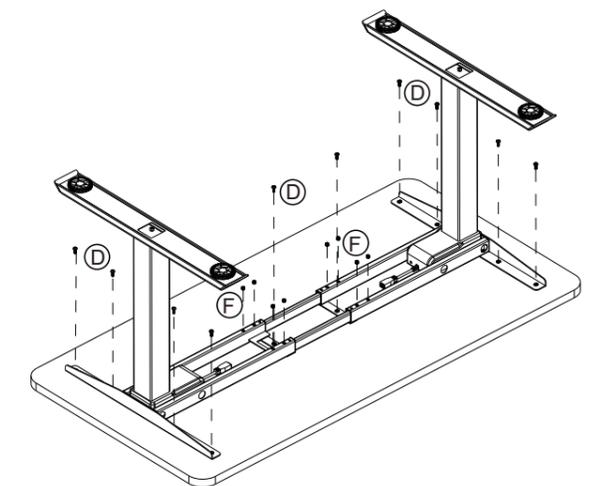


- |                |      |
|----------------|------|
| Ⓓ M5×18 Screws | * 10 |
| Ⓕ M8×6 Screws  | * 8  |

## STEP 5:

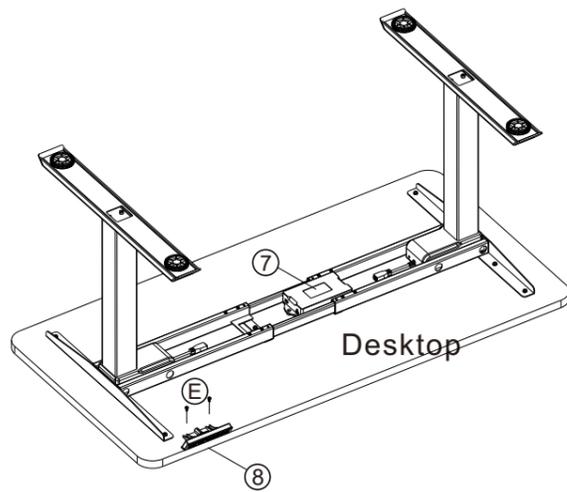


- ⑦ Control Box \* 1
- ⑧ Handset \* 1
- Ⓔ M4×12 Screws \* 2

## STEP 6:

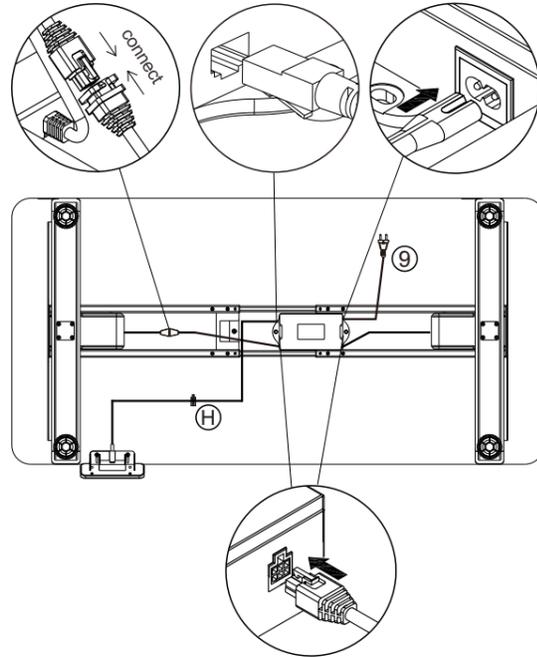

- ⑨ Wires \* 2
- Ⓕ Cable Clips \* 5

# Assembly Instruction

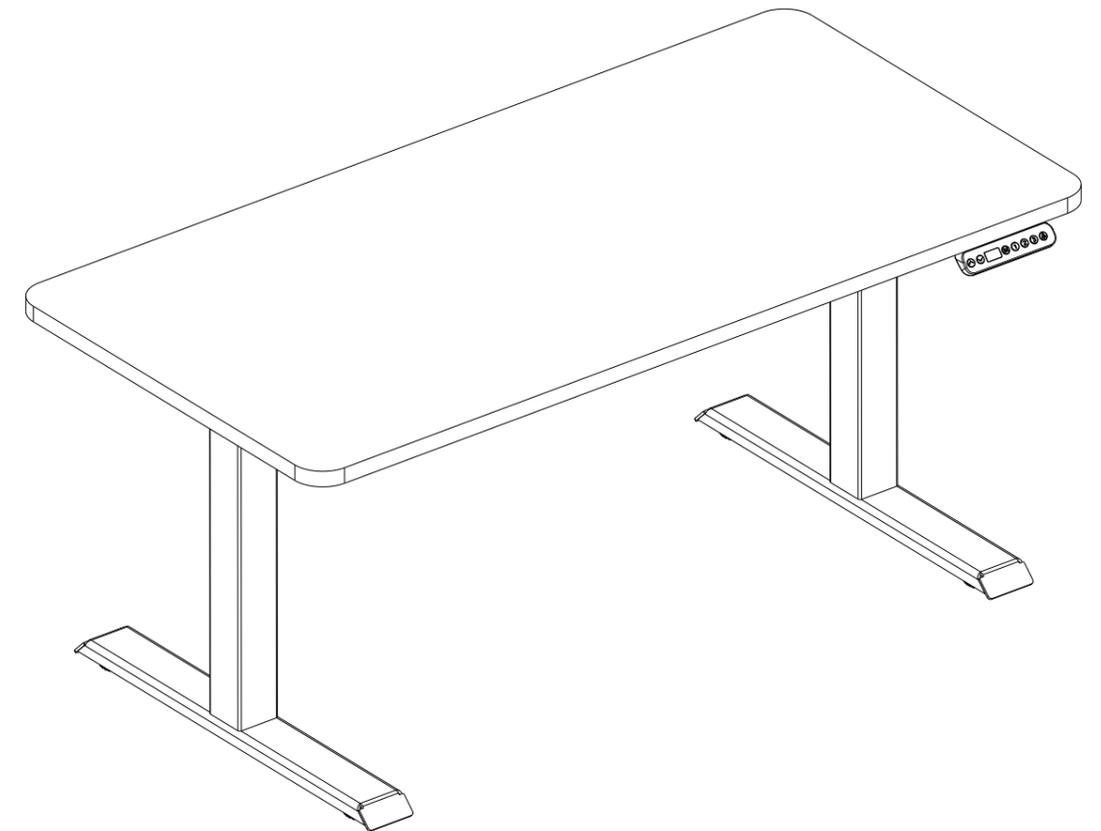


## Ready To Use

**Before Plugging the table into the outlet, make sure that**

- The lift columns are level and set at the lowest position.
- All the screws are tightened, to avoid the desk making noise and wobbling.

**Activate the desk by following the next steps.**

- Please press button down and hold for 10-15 seconds until it stutters and beeps.
- Release the button, then your desk is ready to use.



## Operation Guide

### 1. Memory desired height

- Press button "M", display show "S-" with flash.
- Press number and set desired position.

### 2. Advanced Safety feature- lock and unlock the table.

- Press button up and down at same time for 5 seconds, display "LOC"
- All single button will be inactive and table will be unable to move.
- Pressing button up and down together will unlock the keypad and release the LOC

### 3. Reset the table


**When display show Error code or RST, Please reset the table.**

- Unplug the power cord from the control box.
- Unplug the cable that links the keypad to the control box.
- Wait 30 minutes and plug all the cables in again.
- Do the reset: please press button down and hold for 10-15 seconds until it stutters and beeps.

### 4. How to set sedentary reminder functions

- Press "Clock" buttons, and then press "UP" and "DOWN" buttons to adjust sedentary reminder hours. When screen display small dot which means succeed.

**If the keypad displays HOT, please unplug and replug and let it cool off for a couple of minutes before proceeding again.**

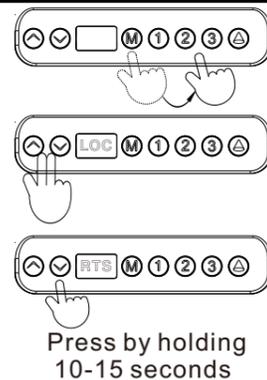

**-Office Desk  
-Electric lifting table**